


Flexam Solid Woven Heavy Duty PVC Belts for Logistics

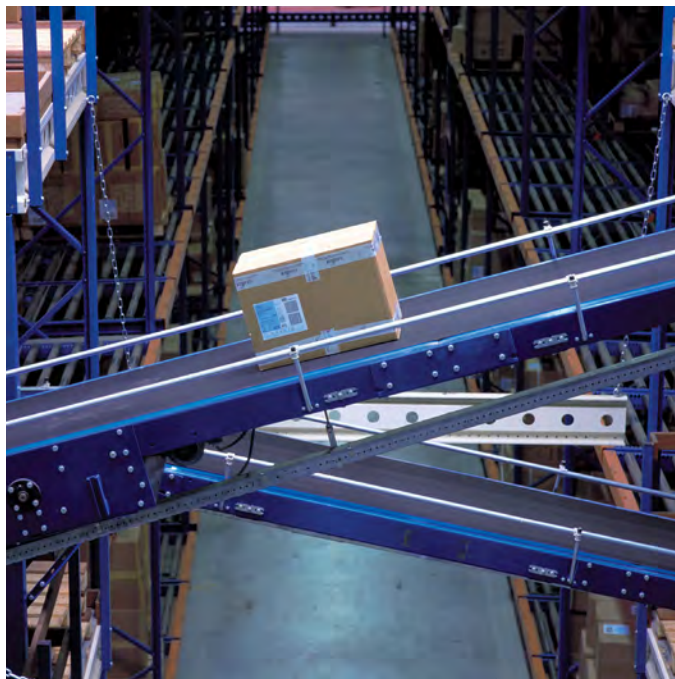

High Performance for the Logistics Industry

Solid woven polyester coated with PVC provides excellent tear and impact resistance along with dimensional stability, delivering high performance solutions for today's evolving logistics industry.


Logistics made better

Flexam SW is a premium quality belting product range for the logistics industry.

Flexam SW (SW stands for Solid Woven), is a belting type originating out of North America which has become an industry standard.

Flexam SW will be available globally at the same Ammeraal Beltech quality you have come to enjoy with our other products.

Six belts are available in different strengths (100, 125 & 150), some with a PVC top cover or A34 profiled cover for inclines. The impregnated carcass without a cover is the most popular belt in our Flexam SW belting range.

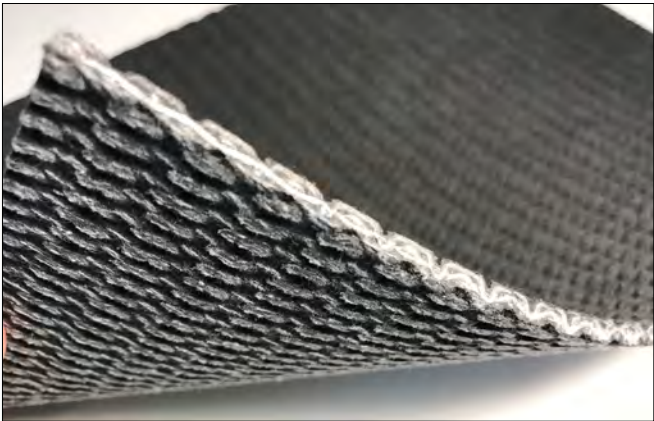

Our SW belt is comprised of a single ply s-weave carcass impregnated with our familiar Flexam PVC formulation.

Available finishes



M2 Matte cover



Friction surface



A34 Profile cover



Features	Benefits
Impact, abrasion, cut and tear resistant	Quick & simple belt installation possible with mechanical fastener
Good lace retention properties	Low maintenance & long service life
Flame retardant according ASTM-D378	Less elongation than common conventional PVC belting
High strength belts available	Lower total cost of ownership
Laterally rigid	
Grip profile for steep inclines available	

Technical belt data

Item Code	Description	Working Tension [N/mm]	Force at 1% Elongation* [N/mm]	Belt Thickness [mm]	Weight [lbs./ft. ²]	Coefficient of Friction: Bottom/Top [Dynamic]	Min. Pulley Bottom/Top flexing ** [mm]
589530	Flexam SW100 00+01 black	18.0	8.0	3.0	0.594	0.25 / 0.3	50 / 50
589548	Flexam SW100 00+03 black M2	18.0	8.0	3.2	0.717	0.25 / 0.6	63.5 / 76
589531	Flexam SW125 00+01 black	21.0	9.0	3.8	0.737	0.25 / 0.3	76 / 76
589549	Flexam SW125 00+04 black M2	21.0	9.0	4.1	0.881	0.25 / 0.6	89 / 101.5
589550	Flexam SW125 00+A34 black	21.0	9.0	6.5	1.188	0.25 / 1.1	140 / 178
589532	Flexam SW150 00+01 black	25.0	10.0	4.6	0.881	0.25 / 0.3	101.5 / 101.5

*k1% relaxed value established in line with ISO 21181:2005

** The minimum drum diameter dimensions were established at room temperature. Lower temperatures require increased drum diameters. Belts with profiles or sidewalls might require larger drum diameters. Diameter dimensions do not apply to conveyor belts with mechanical fasteners.

Our belt description explained

	Flexam	SW100	00	+ 03	Black	M2
1	Type of top cover					
2	Type and strength of fabric					
3	Bottom (cover) thickness or profile style					
4	Top (cover) thickness or profile style					
5	Colour of the top cover					
6	Additional					

Typical applications

Item Code	Description	Unloader	Incline [up to 20 °]	Collection	Transport	Sortation	Accumulation	Industry Nomenclature
589530	Flexam SW100 00+01 black	•					•	PVC 100 FSxFS
589548	Flexam SW100 00+03 black M2	•			•			PVC 100 CxFS
589531	Flexam SW125 00+01 black				•		•	PVC 125 FSxFS
589549	Flexam SW125 00+04 black M2	•						PVC 125 CxFS
589550	Flexam SW125 00+A34 black		•					PVC 125 MRTxFS
589532	Flexam SW150 00+01 black			•	•	•	•	PVC 150 FSxFS

Haven't Found What You Are Looking For?

Ammeraal Beltech is your global supplier for the best PVC belts in the business. Check out our other product families belonging to our logistics & airport product range:

FLEXAM EX: Our EX range is **energy efficient**. EX fabric makes use of a special polyester fibre weave that reduces energy consumption & noise. Minimum elongation makes it easy to track. Not suited however for impact loading.

FLEXAM IR: Our Impact Resistant range incorporates the best of both worlds! A true hybrid, the belt's behaviour is much like a Flexam belt in terms of energy efficiency and tracking, however it retains the strength, cut resistance and lateral stiffness characteristics of **Flexam SW**.

Local Contacts

... and 150 more service contact points
at ammeraalbeltech.com

Argentina

T +54 11 4218 2906
info-ar@ammeraalbeltech.com

Australia

T +61 3 8780 6000
info-au@ammeraalbeltech.com

Austria

T +43 171728 133
info-de@ammeraalbeltech.com

Belgium

T +32 2 466 03 00
info-be@ammeraalbeltech.com

Canada

T +1 905 890 1311
info-ca@ammeraalbeltech.com

Chile

T +56 2 233 12900
info-cl@ammeraalbeltech.com

China

T +86 512 8287 2709
info-cn@ammeraalbeltech.com

Colombia

T +57 893 9890
info-co@ammeraalbeltech.com

Czech Republic

T +420 567 117 211
info-cz@ammeraalbeltech.com

Denmark

T + 45 7572 3100
info-dk@ammeraalbeltech.com

Finland

T +358 207 911 400
info-fi@ammeraalbeltech.com

France

T +33 3 20 90 36 00
info-fr@ammeraalbeltech.com

Germany

T +49 4152 937-0
info-de@ammeraalbeltech.com

Hungary

T +36 30 311 6099
info-hu@ammeraalbeltech.com

India

T +91 44 265 34 244
info-in@ammeraalbeltech.com

Israel

T +972 4 6371485
info-il@ammeraalbeltech.com

Italy

T +39 051 660 60 06
info-it@ammeraalbeltech.com

Japan

T +81 52 433 7400
info-jp@ammeraalbeltech.com

Luxembourg

T +352 26 48 38 56
info-lu@ammeraalbeltech.com

Malaysia

T +60 3 806 188 49
info-my@ammeraalbeltech.com

Mexico

T +52 55 5341 8131
info-mx@ammeraalbeltech.com

Netherlands

T +31 72 57 51212
info-nl@ammeraalbeltech.com

Poland

T +48 32 44 77 179
info-pl@ammeraalbeltech.com

Portugal

T +351 22 947 94 40
info-pt@ammeraalbeltech.com

Singapore

T +65 62739767
info-sg@ammeraalbeltech.com

Slovakia

T +421 2 55648541-2
info-sk@ammeraalbeltech.com

South Korea

T +82 31 448 3613-7
info-kr@ammeraalbeltech.com

Spain

T +34 93 718 3054
info-es@ammeraalbeltech.com

Sweden

T +46 44 780 3010
info-se@ammeraalbeltech.com

Switzerland

T +41 55 2253 535
info-ch@ammeraalbeltech.com

Thailand

T +66 2 902 2604-13
info-th@ammeraalbeltech.com

Turkey

T +90 232 877 0700
info-tr@ammeraalbeltech.com

United Kingdom

T +44 1992 500550
info-uk@ammeraalbeltech.com



United States

T +1 847 673 6720
info-us@ammeraalbeltech.com

Vietnam

T +84 8 376 562 05
info-vn@ammeraalbeltech.com

**Expert advice, quality solutions
and local service
for all your belting needs**



General contact information:

Ammeraal Beltech
P.O. Box 38
1700 AA Heerhugowaard
The Netherlands

T +31 (0)72 575 1212
info@ammeraalbeltech.com

ammega.com