

Merge belt for airports and logistic centers

... for efficient and accurate merging parcels ...

Ammeraal Beltech has belting solutions for all stages of airport baggage handling, courier package handling, mail handling, and sortation at distribution centers.

Horizontal 30 and 45 degree merge conveyors are designed to queue baggage within a system, precisely adding bags from one conveyor line to another at high rates of speed.

Merge conveyors are typically used in a standard baggage system and can be integrated with other queue type conveyors, power turns, or standard horizontal conveyors. The merge conveyors are available in forward and reverse operation modes and various center line lengths. They can also be used with other pusher and diverting devices.

Our new merge belt is engineered to provide efficient and accurate merging of various baggage sizes and can cycle up to 60 bags per minute.

Main features

- Longitudinally and laterally flexible; suitable for small diameter transfer
- Low coefficient of friction
- Wear and heat resistant
- Antistatic properties
- Flame retardant according ISO 340

Customer benefits

- Long service life
- Low maintenance costs
- Less dust attraction
- Quick Maestro Splicing system for on-site installation with little downtime


Main application

- Airport baggage handling
- Courier package handling
- Mail handling
- Sortation at distribution centers



Technical data	
Article code	514601
Nomenclature	Flexam EF 12/2 0+02 black M2 AS FR
Belt thickness	1.9 mm
Hardness	80 shore A
Weight	2.6 kg/m ²
Force at 1% elongation	12 N/mm
Surface finish	fine matte finish
Min. diameter flexing	40 mm
Min. diameter backflexing	70 mm
Temperature range	-5 to +176 °F
Max. production width	3000 mm

Additional nomenclature: M2 = matte finish, AS = antistatic, FR = flame retardant

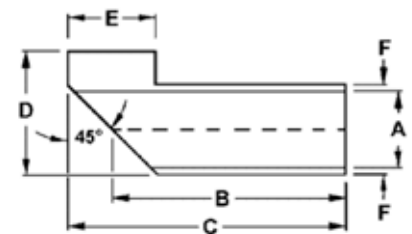

Expert advice, quality solutions and local service for all your belting needs
www.ammeraalbeltech.com

Ammeraal Beltech North America
 7501 N. St. Louis Avenue
 Skokie, IL 60076
 T +1 847 673 6720
 F +1 847 673 6373
 TF +1 800 323 4170

This information is subject to alteration due to continuous development. Ammeraal Beltech will not be held liable for the incorrect use of the above stated information. This information replaces previous information. All activities performed and services rendered by Ammeraal Beltec are subject to general terms and conditions of sale and delivery, as applied by its operating companies.

info-us@ammeraalbeltech.com
www.ammeraalbeltech.com